The FBP Series quickly converts standard fluorescent luminaires into emergency luminaires.

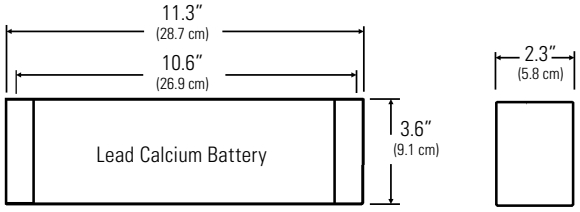

Complete Fixture consists of ballast unit. Select options and accessories below.

Model #	Max. Lumens	Lamp Operation
FBPPL	825	One

Features

1. **Lamp Operation:** Operates the following lamp types: T4 Compact fluorescent (2 pin with integral starter). See Lamp Operation and performance table for specific lamp performance and operation.
2. **Illumination:** Provides 90 minutes of emergency illumination, and produces a maximum of 825 lumens initial emergency light output. .
3. **Housing:** Constructed of 20 gauge galvanized steel. Housing allows for housing frame mounting on most recessed luminaires.
4. **Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Charging system is complete with AC indicator lamp and test switch.
5. **Battery:** Maintenance free, sealed lead calcium battery has an estimated service life of 5 years, and an operating temperature range of 20°F (7°C) to 95°F (35°C).
6. **Input Power Requirements:** 3.5 watts max.
7. **Warranty: Electronics:** 2 years; Battery: 2 years.

Code Compliance

UL 924 listed.

Options

ST = Special Input Transformer for 220 VAC/50 Hz, 240 VAC/50Hz. Contact factory for other input voltages and frequencies.

Accessories

CCAPS = Wire bundle cover for mounting external to luminaire

Lamp Operation and Performance

Lamp Type	Watt.	Non-Emerg. Base Type	Emerg. Op. Max. Lumen Output	Max. Lumen Output	Emer Lamp Operation
F5BXT4	5	G23/2 Pin	250	250	One Only
F7BXT4	7	G23/2 Pin	400	400	One Only
F9BXT4	9	G23/2 Pin	600	600	One Only
F13BXT4	13	GX23/2 Pin	825	825	One Only

Notes:

1. Maximum non-emergency lumen output can vary based on lamp manufacturer, ambient operating temperature, and ballast manufacturer.
2. Maximum emergency lumen output is based on total output of one or two lamps, and can vary based on lamp manufacturer and ambient operating temperature.
3. Maximum emergency lumen output is supported for a full 90 minutes of operation.
4. Consult factory for compatibility, operation and performance of lamp types not listed.

Job Information **Type:**

Job Name:

Cat. No.:

Lamp(s):

Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • B0308